




# 无锡立达齿轮制造有限公司

WUXI LIDA GEAR MANUFACTURING CO., LTD

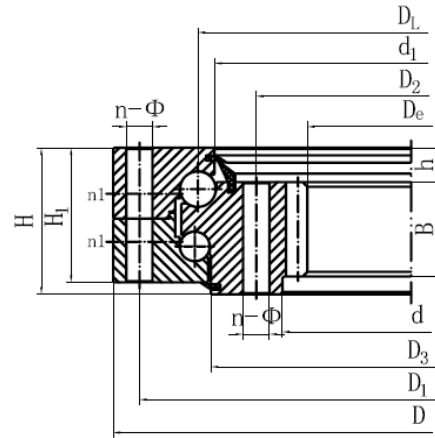

JB/T2300-1999

023 serie

024 serie

Number	Basic Type	Dimensions			Installation hole size				Structure size				Gear Data				Tangential Tooth Load		Weight Reference (KG)	
	Inner teeth D <sub>L</sub> mm	D mm	d mm	H mm	D <sub>1</sub> mm	D <sub>2</sub> mm	n	Φ mm	n <sub>1</sub>	D <sub>3</sub> mm	d <sub>1</sub> mm	H <sub>1</sub> mm	h mm	B	m	De	Z	Normalizing KN		Tempering KN
1	023.25.500	616	384	106	580	420	20	18	4	482	477	96	26	60	5	357	72	37	52	126
	6														350.4	59	45	62	128	
2	023.25.560	676	444	106	640	480	20	18	4	543	537	96	26	60	5	417	84	37	52	143
	6														410.4	69	45	62	144	
3	023.25.630	746	514	106	710	550	24	18	4	613	607	96	26	60	6	482.4	81	45	62	160
	8														475.2	60	60	83	162	
4	023.25.710	826	594	106	790	630	24	18	4	692	687	96	26	60	6	560.4	94	45	62	183
	8														555.2	70	60	83	184	
5	023.30.800	942	658	124	898	702	30	22	6	777	771	114	29	80	8	619.2	78	80	111	300
	10														614	62	100	140	301	
6	023.30.900	1042	758	124	998	802	30	22	6	877	871	114	29	80	8	715.2	90	80	111	337
	10														714	72	100	141	335	
7	023.30.1000	1142	858	124	1098	902	36	22	6	977	971	114	29	80	10	814	82	100	141	371
	12														796.8	67	120	167	383	



# 无锡立达齿轮制造有限公司

WUXI LIDA GEAR MANUFACTURING CO., LTD

Number	Basic Type	Dimensions			Installation hole size				Structure size				Gear Data				Tangential Tooth Load		Weight Reference (KG)	
	Inner teeth D <sub>L</sub> mm	D mm	d mm	H mm	D <sub>1</sub> mm	D <sub>2</sub> mm	n	Φ mm	n <sub>1</sub>	D <sub>3</sub> mm	d <sub>1</sub> mm	H <sub>1</sub> mm	h mm	B	m	De	Z	Normalizing KN		Tempering KN
8	023.30.1120	1262	978	124	1218	1022	36	22	6	1097	1091	114	29	80	10	944	95	100	140	429
	12														916.8	77	120	167	432	
9	023.40.1250	1426	1074	160	1374	1126	40	26	5	1215	1214	150	39	90	12	1012.8	85	135	188	746
	14														1013.6	73	158	219	741	
10	023.40.1400	1576	1224	160	1524	1272	40	26	5	1365	1364	150	39	90	12	1156.8	97	135	188	850
	14														1153.6	83	158	219	850	
11	023.40.1600	1776	1424	160	1724	1476	45	26	5	1565	1564	150	39	90	14	1349.6	97	158	219	979
	16														1350.4	85	181	250	972	
12	023.40.1800	1976	1624	160	1924	1676	45	26	5	1765	1764	150	39	90	14	1545.6	111	158	219	1117
	16														1542.4	97	181	250	1116	
13	023.50.2000	2215	1785	190	2149	1851	48	33	8	1965	1962	178	47	120	16	1702.4	107	241	333	1733
	18														1699.2	95	271	375	1732	
14	023.50.2240	2455	2025	190	2389	2091	48	33	8	2206	2202	178	47	120	16	1942.4	122	241	333	1956
	18														1933.2	108	271	375	1973	
15	023.50.2500	2715	2285	190	2649	2351	56	33	8	2465	2462	178	47	120	18	2203.2	123	271	375	2164
	20														2188	110	301	418	2204	
16	023.50.2800	3015	2585	190	2949	2651	56	33	8	2765	2762	178	47	120	18	2491.2	139	271	375	2486
	20														2488	125	301	418	2485	
17	023.60.3150	3428	2872	226	3338	2962	56	45	8	3104	3102	214	56	150	20	2768	139	377	522	4137
	22														2758.8	126	415	574	4167	
18	023.60.3550	3828	3272	226	3738	3362	56	45	8	3504	3502	214	56	150	20	3168	159	377	522	4700
	22														3176.8	145	415	574	4627	
19	023.60.4000	4278	3722	226	4188	3812	60	45	10	3954	3952	214	56	150	22	3618.8	165	415	574	5298
	25														3610	145	471	652	5309	
20	023.60.4500	4778	4222	226	4688	4312	60	45	10	4454	4452	214	56	150	22	4122.8	188	415	574	5952
	25														4110	165	471	652	6011	