




无锡立达齿轮制造有限公司

WUXI LIDA GEAR MANUFACTURING CO., LTD

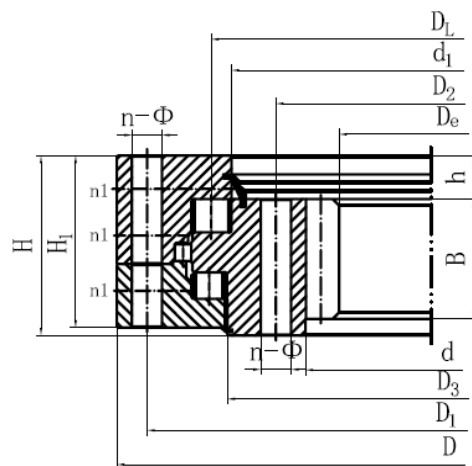

JB/T2300-1999

133 serie

134 serie

Number	Basic Type	Dimensions			Installation hole size				Structure size				Gear Data				Tangential Tooth Load		Weight Reference (KG)	
	Inner teeth D _L mm	D mm	d mm	H mm	D ₁ mm	D ₂ mm	n	Φ mm	n ₁	D ₃ mm	d ₁ mm	H ₁ mm	h mm	B	m	De	Z	Normalizing KN		Tempering KN
1	133.25.500	634	366	148	598	402	24	18	4	474	463	138	32	80	5	337	68	50	67	198
	6														338.4	57	60	80	198	
2	133.25.560	694	426	148	658	462	24	18	4	534	523	138	32	80	5	397	80	50	67	222
	6														398.4	67	60	80	220	
3	133.25.630	764	496	148	728	532	28	18	4	604	593	138	32	80	6	458.4	77	60	80	253
	8														459.2	58	80	110	251	
4	133.25.710	844	576	148	808	612	28	18	4	684	673	138	32	80	6	536.4	90	60	80	288
	8														539.2	68	80	110	284	
5	133.32.800	964	636	182	920	680	36	22	4	770	759	157	40	120	8	595.2	75	121	167	483
	10														594	60	151	209	481	
6	133.32.900	1064	736	182	1020	780	36	22	4	870	859	172	40	120	8	691.2	87	121	167	551
	10														694	70	151	209	545	
7	133.32.1000	1164	836	182	1120	880	40	22	5	970	959	172	40	120	10	784	79	151	209	618
	12														784.8	66	181	251	613	



无锡立达齿轮制造有限公司

WUXI LIDA GEAR MANUFACTURING CO., LTD

Number	Basic Type	Dimensions			Installation hole size				Structure size				Gear Data				Tangential Tooth Load		Weight Reference (KG)	
	Inner teeth D _L mm	D mm	d mm	H mm	D ₁ mm	D ₂ mm	n	Φ mm	n ₁	D ₃ mm	d ₁ mm	H ₁ mm	h mm	B	m	De	Z	Normalizing KN		Tempering KN
8	133.32.1120	1284	956	182	1240	1000	40	22	5	1090	1079	172	40	120	10	904	91	151	209	698
	12														904.8	76	181	251	691	
9	133.40.1250	1445	1055	220	1393	1107	45	26	5	1213	1200	210	50	150	12	988.8	83	229	314	1123
	14														985.6	71	263	366	1122	
10	133.40.1400	1595	1205	220	1543	1257	45	26	5	1363	1350	210	50	150	12	1144.8	96	229	314	1254
	14														1139.6	82	263	366	1258	
11	133.40.1600	1795	1405	220	1743	1457	48	26	6	1563	1500	210	50	150	14	1335.6	96	263	366	1454
	16														1334.4	84	302	417	1448	
12	133.40.1800	1995	1605	220	1943	1657	48	26	6	1763	1750	210	50	150	14	1531.6	110	263	366	1658
	16														1526.4	96	302	417	1663	
13	133.45.2000	2221	1779	231	2155	1845	60	33	6	1967	1945	219	54	160	16	1702.4	107	322	445	2114
	18														1699.2	95	362	501	2112	
14	133.45.2240	2461	2019	231	2395	2085	60	33	6	2207	2185	219	54	160	16	1926.4	121	32	445	2447
	18														1933.2	108	362	501	2407	
15	133.45.2500	2721	2279	231	2655	2345	72	33	8	2467	2445	219	54	160	18	2185.2	122	362	501	2862
	20														2188	110	402	556	2834	
16	133.45.2800	3021	2579	231	2955	2645	72	33	8	2767	2745	219	54	160	18	2491.2	139	360	501	3211
	20														2488	125	402	556	3209	
17	133.50.3150	3432	2868	270	3342	2958	72	45	8	3104	3090	258	65	180	20	2768	139	452	626	4954
	22														2758.8	126	498	689	4988	
18	133.50.3550	3832	3268	270	3742	3358	72	45	8	3504	3490	258	65	180	20	3168	159	452	626	5638
	22														3154.8	144	498	689	5706	
19	133.50.4000	4282	3718	270	4192	3808	80	45	8	3954	3940	258	65	180	22	3116.8	165	498	689	6257
	25														3610	145	565	783	6268	
20	133.50.4500	4782	4218	270	4692	4308	80	45	8	4454	4440	258	65	180	22	4122.8	188	498	689	7040
	25														4110	165	565	783	7108	